



# PRONTO 2023




*Ship it*

PERFORMANCE  
**iN** LIGHTING

powered by  
**GEWISS**





## PRONTO | Core program

The "PRONTO" program consists of those article codes which you may more easily find in stock (shipment between working 3-10 days).

These codes are generally available with shorter delivery times. Please select these codes when a "quick ship" lead time is necessary for your project.

## PRONTO | Kernprogramm

Das "Pronto"-Programm umfasst die Artikelcodes, die wir generell auf Lager führen (Versand zwischen 3-10 Tagen). Im Allgemeinen haben diese Artikel eine höhere Verfügbarkeit und dadurch kurze Lieferzeiten. Wenn das Timing also von entscheidender Bedeutung ist, empfehlen wir ihnen, die im Katalog aufgeführten Produkte zu bevorzugen.

## PRONTO | Les Essentiels

Le programme coeur de gamme "PRONTO" est composé de codes articles essentiels généralement en stock (expédition entre 3 à 10 jours ouvrables).

Ces articles ont une disponibilité plus élevée des conditions d'approvisionnement améliorées. Sélectionnez ces codes lorsqu'un délai plus court est nécessaire pour votre projet.

## PRONTO | Kernpakket

Het programma "PRONTO" bevat de artikelcodes die we normaal gesproken op voorraad hebben (verzending tussen werken 3-10 dagen).

Over het algemeen hebben deze codes een hogere beschikbaarheid en betere leveringsvoorwaarden.

Als timing essentieel is, adviseren wij deze codes te selecteren.

## PRONTO | Core program

În cadrul catalogului PRONTO, poți găsi produse disponibile în stoc, cu un timp de livrare între 3-10 zile lucrătoare.

Aceste coduri de produs au, în general, un termen de livrare scurt. Dacă ai nevoie de o expediție imediată în cadrul proiectelor cu termene strânse, poți opta pentru aceste coduri cu livrare rapidă.



## Get more information with this QR code!

By scanning this QR code you can access more of our product's technical data and associated regulations as well as the most recent technical data and versions of products and/or LEDs not found in the print catalogue. With a simple click on your mobile phone you will be immediately directed to the most up-to-date technical information for the product or series you are searching for.

## Accédez à plus d'informations grâce à ce QR code!

En scannant ce QR code, vous pourrez accéder à davantage de données techniques relatives aux produits et aux réglementations associées, ainsi qu'aux données techniques les plus récentes et aux versions de produits et/ou solutions LED qui ne sont pas présentées sur ce catalogue papier.

Par un simple clic sur votre mobile, vous serez immédiatement dirigés sur la dernière mise à jour de la fiche technique du produit ou de la série que vous recherchez.

## Scan de QR-code voor meer informatie!

Door deze QR-code te scannen, krijgt u toegang tot meer en meest recente (technische) gegevens van ons product en bijbehorende voorschriften, evenals gegevens van de versies die niet in de gedrukte catalogus staan.

Met een simpele scan met uw mobiele telefoon wordt u direct doorverwezen naar de meest actuele (technische) informatie van het product of de serie die u zoekt.

## Weitere Informationen erhalten Sie über diesen QR-Code!

Durch Scannen dieses QR-Codes erhalten Sie Zugang zu weiteren technischen Daten, Produkten und Normen, sowie zu den aktuellen technischen Produktdaten oder LED-Versionen, die nicht in diesem gedruckten Katalog enthalten sind.

Mit einem einfachen Klick auf Ihrem Mobiltelefon werden Sie sofort zum aktuellen Produktdatenblatt oder der gesuchten Serie weitergeleitet.

## Obține mai multe informații cu acest cod QR!

Prin scanarea acestui cod QR poți accesa mai multe detalii ale produselor noastre și reglementările asociate, precum și cele mai recente date tehnice și versiuni ale produselor și/sau LED-urilor care nu se găsesc în catalogul tipărit.

Cu un simplu clic pe telefonul mobil, vei fi direcționat imediat către cele mai recente informații tehnice pentru produsul sau gama de produse pe care o cauți.

# Technical indoor

Wall Ceiling surface

Wand- und Deckenanbauleuchten

Plafond opbouwarmaturen

Appliques plafond/mur

Pared/techo



**10**  
FL ROUND 333 AB

**10**  
FL ROUND 555 AB

**11**  
WL220 ROUND

**11**  
WL270 ROUND

**11**  
WL400 ROUND



**11**  
WL210 SQUARE

**11**  
WL260 SQUARE

**11**  
WL390 SQUARE

Downlights

Einbau-Downlights



**12**  
DLSB150 LED

**12**  
DLSB185 LED

**12**  
DLSB220 LED

**13**  
DL ROUND MIDI

**13**  
DL ROUND MAXI

**13**  
DL SQUARE MAXI



**14**  
MANGO+ MIDI

**14**  
MANGO+ MAXI

# Office

---

Suspended  
Pendelleuchten  
Pendelarmaturen  
Suspensions  
De suspensión



**15**  
SL713+ PL



**15**  
SL629 PL

---


Ceiling surface  
Anbauleuchten  
Plafond  
opbouwarmaturen  
Appliques plafond  
Luminarias de techo




**16**  
SL629AB

---

Ceiling recessed  
Einbauleuchten  
Plafond  
inbouwarmaturen  
Encastrés plafond  
Empotrables de techo




**16**  
PLATO 600



**17**  
PLATO 625



**17**  
PLATO 1200



**18**  
ELA 600



**18**  
ELA 625



# Industrial

Hi-bay / low-bay

Hallenpendelleuchten

High-bay en low-bay  
armaturen

Suspensions industrielles

Luminarias para naves  
industriales



19  
LAMA+



20  
LAMA+ MINI



21  
A+

Surface weatherproofs

Leuchten mit erhöhter  
Schutzart

Waterdichte  
opbouwarmaturen

Luminaires industriels  
étanches

Luminarias estancas



22  
ACRO BASIC



23  
ACRO PRO



24  
NORMA+



24  
NORMA+ CL

# Residential

Wall / Ceiling surface

Glasenbauleuchten

Glasen opbouwarmaturen

Plafonniers en verre  
pressé

Plafones de cristal  
prensado



25  
BLIZ RING



27  
NIKKO+ 21



25  
EKO+26



26  
EKO 21



26  
EKO 21 GRILL



26  
EKO 26



27  
DROP 28

Bulkheads

Anbauleuchten

Opbouwarmaturen

Plafonniers

Plafones



28  
MULTI+ 30 PC



29  
MULTI+ 40 PC



30  
CLY


Posts / garden co-ords

Pollerleuchten

Mastjes / tuinverlichting

Potelet et coordonnées  
jardin

Postes de Jardin



31  
STILO+ MIDI



31  
STILO+ MAXI



32  
PADO 600



32  
PADO BASIC



# Architectural

## Ceiling surface

Deckenanbauleuchten

Plafond  
opbouwarmaturen

Appliques plafond

Luminarias de techo



33  
QUASAR 10  
CEILING



33  
QUASAR 30  
CEILING


## Wall surface

Wandanbauleuchten

Wand opbouwarmaturen

Appliques murales

luminarias de pared



34  
QUASAR 10



35  
QUASAR 20



36  
QUASAR 30



37  
ORION H



37  
ORION V



38  
SHIELD+ 1



38  
SHIELD+ 2

## Step lighting

Stufenbeleuchtung

Oriëntatieverlichting

Marqueur de chemin

Iluminación rasante



39  
INSERT+ ZERO



39  
INSERT+ ZERO  
CLIPS



39  
INSERT+ ZERO  
GLASS



40  
INSERT+ 1



40  
INSERT+ 2

## Bollards

Pollerleuchten

Bollards

Bornes

Bolardos/balizas



42  
MIMIK 10 POST  
300



42  
MIMIK 10 POST  
600



42  
MIMIK 10 POST  
1000


## Feature Spot Lights

Scheinwerfer

Schijnwerpers

Projecteurs

Proyectores



43  
TYK+ 10



44  
FOCUS+ ZERO KIT



44  
FOCUS+ ZERO


## Ingounds

Bodeneinbauleuchten

Grond inbouwarmaturen

Encastrés de sol

Empotrables de suelo



45  
CRICKET+ 10



# Sports and Area

---

Floodlighting  
Scheinwerfer  
Schijnwerpers  
Projecteurs  
Proyectoros



46  
WIN PRO 20



47  
WIN PRO 30



48  
GUELL ZERO KIT



48  
GUELL ZERO



49  
GUELL 1




50  
GUELL 2



51  
GUELL 2,5




52  
SPIDER+ 10 KIT



52  
SPIDER+ 10



53  
SPIDER+ 20



53  
SPIDER+ 30

# Urban and Street

---

Area lighting  
Stadt- und Parkleuchten  
Terrainverlichting  
Aménagements urbains  
Iluminación áreas urbanas



55  
HEDO+

Street lighting  
Straßenleuchten  
Straatverlichting  
Éclairage routier  
Iluminación vías públicas



56  
SPIDER+ POST



55  
LYRA+



# FL ROUND 333 AB



- BK-RAL9005 / Black RAL9005 / Textured
- WH-RAL9016 / White RAL9016 / Textured

Scan the QR-code for the latest information

## FL ROUND 333 AB OP CORONA


IP20 - IK06 - 650 °C



LUMINAIRE WATTAGE (W)	CLASS	EMEC	EMC EN 55024-1	CEI	KELVIN	LIGHT SOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	PHOTO
-----------------------	-------	------	----------------	-----	--------	--------------------------------	-----------------------------	----------------	-------------	-------

### Power LED 220-240 V 50/60 Hz

26	I	-	-	80	4000	4100	3270	■	<b>3116316</b>	
26	I	-	-	80	3000	3980	3180	■	<b>3116315</b>	
26	I	-	-	80	4000	4100	3270	□	<b>8333691263410</b>	
26	I	-	-	80	3000	3980	3180	□	<b>8333691263310</b>	



# FL ROUND 555 AB



- BK-RAL9005 / Black RAL9005 / Textured
- WH-RAL9016 / White RAL9016 / Textured

Scan the QR-code for the latest information

## FL ROUND 555 AB OP CORONA


IP20 - IK06 - 650 °C



LUMINAIRE WATTAGE (W)	CLASS	EMEC	EMC EN 55024-1	CEI	KELVIN	LIGHT SOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	PHOTO
-----------------------	-------	------	----------------	-----	--------	--------------------------------	-----------------------------	----------------	-------------	-------

### Power LED 220-240 V 50/60 Hz

50	I	-	-	80	4000	7700	6390	■	<b>3116324</b>	
50	I	-	-	80	3000	7470	6190	■	<b>3116323</b>	
50	I	-	-	80	4000	7700	6390	□	<b>8555691513410</b>	
50	I	-	-	80	3000	7470	6190	□	<b>8555691513310</b>	



# WL ROUND



■ GR-94 / Metallic grey / Textured



Scan the QR-code for the latest information

## WL220 OPAL

IP20 - IK05 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
10/15	II	-	80	3000/4000	S/B	-	1900	1550	■	<b>3105557</b>	

## WL270 OPAL


IP20 - IK05 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
10/18/24	II	-	80	3000/4000	S/B	-	3300	2650	■	<b>3105559</b>	

## WL400 OPAL

IP20 - IK05 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
29/38	II	-	80	3000/4000	S/B	-	4800	3890	■	<b>3105561</b>	



# WL SQUARE



■ GR-94 / Metallic grey / Textured



Scan the QR-code for the latest information

## WL210 OPAL

IP20 - IK05 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
10/15	II	-	80	3000/4000	S/B	-	2000	1620	■	<b>3105556</b>	



## WL260 OPAL

IP20 - IK05 - 650 °C


LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
10/18/24	II	-	80	3000/4000	S/B	-	3350	2720	■	<b>3105558</b>	



## WL390 OPAL

IP20 - IK05 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
29/38	II	-	80	3000/4000	S/B	-	5000	4020	■	<b>3105560</b>	



# DLSB LED



WH-RAL9016 / White RAL9016 / Textured

Scan the QR-code for the latest information


## DLSB150 LED OPAL COVER - 95 MM

IP20 - IK07 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	EN EN 12464-1	CRI	KELVIN	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PHOTO
-----------------------	-------	------	---------------	-----	--------	-------------------------------	-----------------------------	----------------	-------------	-------

### Power LED 220-240 V 50/60 Hz

24	I	-	-	80	4000	3010	1990	<input type="checkbox"/>	<b>815712334001</b>	
19	I	-	-	80	4000	2510	1700	<input type="checkbox"/>	<b>815711834001</b>	




## DLSB185 LED OPAL COVER - 95 MM

IP20 - IK07 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	EN EN 12464-1	CRI	KELVIN	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PHOTO
-----------------------	-------	------	---------------	-----	--------	-------------------------------	-----------------------------	----------------	-------------	-------

### Power LED 220-240 V 50/60 Hz

26	I	-	-	80	4000	3410	2440	<input type="checkbox"/>	<b>818712434001</b>	
18	I	-	-	80	4000	2460	1900	<input type="checkbox"/>	<b>818711634001</b>	




## DLSB220 LED OPAL COVER - 95 MM

IP20 - IK07 - 650 °C



LUMINAIRE WATTAGE [W]	CLASS	ENEC	EN EN 12464-1	CRI	KELVIN	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PHOTO
-----------------------	-------	------	---------------	-----	--------	-------------------------------	-----------------------------	----------------	-------------	-------

### Power LED 220-240 V 50/60 Hz

26	I	-	-	80	4000	3850	2940	<input type="checkbox"/>	<b>822721234001</b>	
----	---	---	---	----	------	------	------	--------------------------	---------------------	--



# DL ROUND



Scan the QR-code for the latest information


## DL ROUND MIDI

IP20 - IK07 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	EN EN 12464-1	CRI	KELVIN	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	PRONTO
-----------------------	-------	------	---------------	-----	--------	-------------------------------	-----------------------------	----------------	-------------	--------

Power LED 220-240 V 50/60 Hz

13	I	-	-	90	3000	1900	1640		<b>3108964</b>	
----	---	---	---	----	------	------	------	--	----------------	--



## DL ROUND MAXI


IP20 - IK07 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	EN EN 12464-1	CRI	KELVIN	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	PRONTO
-----------------------	-------	------	---------------	-----	--------	-------------------------------	-----------------------------	----------------	-------------	--------

Power LED 220-240 V 50/60 Hz

21	I	-	-	80	4000	3500	3130		<b>3108978</b>	
----	---	---	---	----	------	------	------	--	----------------	--

15	I	-	-	80	4000	2500	2260		<b>3108972</b>	
----	---	---	---	----	------	------	------	--	----------------	--



## Optional accessories

DESCRIPTION	COLOR	PART NUMBER	PRONTO
-------------	-------	-------------	--------


**DL ROUND MAXI**

Louvre reflector DL ROUND MAXI		<b>3109012</b>	
--------------------------------	--	----------------	--



3109012

# DL SQUARE



Scan the QR-code for the latest information


## DL SQUARE MAXI

IP20 - IK07 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	EN EN 12464-1	CRI	KELVIN	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	PRONTO
-----------------------	-------	------	---------------	-----	--------	-------------------------------	-----------------------------	----------------	-------------	--------

Power LED 220-240 V 50/60 Hz

15	I	-	-	80	4000	2500	2260		<b>3108996</b>	
----	---	---	---	----	------	------	------	--	----------------	--




## Optional accessories

DESCRIPTION	COLOR	PART NUMBER	PRONTO
-------------	-------	-------------	--------

**DL SQUARE MAXI**

Louvre reflector DL SQUARE MAXI		<b>3109020</b>	
---------------------------------	--	----------------	--



3109020

# MANGO+ MIDI



Scan the QR-code for the latest information

WH-RAL9010 / White RAL9010 / Textured


## MANGO+ MIDI MULTIPOWER

IP20 - IK07 - 650 °C


LUMINAIRE WATTAGE [W]	CLASS	ENEC	ENEC LABEL	CEI	KELVIN	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
-----------------------	-------	------	------------	-----	--------	--------------------------------	-----------------------------	----------------	-------------	--------

### Power LED 220-240 V 50/60 Hz

11.5/15	II	-	-	80	4000	1980	1496	<input type="checkbox"/>	<b>3109843</b>	
11.5/15	II	-	-	80	3000	1926	1455	<input type="checkbox"/>	<b>3109842</b>	



# MANGO+ MAXI



Scan the QR-code for the latest information

WH-RAL9010 / White RAL9010 / Textured


## MANGO+ MAXI MULTIPOWER

IP20 - IK07 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	ENEC LABEL	CEI	KELVIN	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
-----------------------	-------	------	------------	-----	--------	--------------------------------	-----------------------------	----------------	-------------	--------


### Power LED 220-240 V 50/60 Hz

18.5/24	II	-	-	80	4000	3450	2605	<input type="checkbox"/>	<b>3109851</b>	
18.5/24	II	-	-	80	3000	3354	2555	<input type="checkbox"/>	<b>3109850</b>	





# SL713+ PL



Scan the QR-code for the latest information

■ GR-RAL9006 / Grey RAL9006 / Textured


## SL713+ PL MP S/C

IP20 - IK05 - 650 °C


LUMINAIRE WATTAGE [W]	CLASS	EMEC	DM EN 12464-1	CRI	KELVIN	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PRONTO
-----------------------	-------	------	---------------	-----	--------	--------------------------------	-----------------------------	----------------	-------------	-------------	--------

Power LED 220-240 V 50/60 Hz

69		-	✓	80	4000	11010	9010	■		<b>3111530</b>	
----	--	---	---	----	------	-------	------	---	--	----------------	--



# SL629 PL



Scan the QR-code for the latest information

■ GR-RAL9006 / Grey RAL9006 / Textured  
□ WH-RAL9016 / White RAL9016 / Textured


## SL629 PL PRISM D/I

IP20 - IK05 - 650 °C


LUMINAIRE WATTAGE [W]	CLASS	EMEC	DM EN 12464-1	CRI	KELVIN	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PRONTO
-----------------------	-------	------	---------------	-----	--------	--------------------------------	-----------------------------	----------------	-------------	-------------	--------

Power LED 220-240 V 50/60 Hz

69		✓	✓	80	4000	12000	8680	■		<b>8629461783430</b>	
69		✓	✓	80	4000	12000	8680	□		<b>8629461783410</b>	
69		✓	✓	80	3000	11640	8420	■		<b>8629461783310</b>	
54		✓	✓	80	4000	8900	6830	■		<b>8629461543430</b>	
54		✓	✓	80	4000	8900	6830	□		<b>8629461543410</b>	



# SL629 AB




Scan the QR-code for the latest information

- GR-RAL9006 / Grey RAL9006 / Textured
- WH-RAL9016 / White RAL9016 / Textured



## SL629 AB PRISM

IP20 - IK05 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	EMEC	EN EN 12464-1	CRI	KELVIN	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
69	I	✓	-	80	4000	12000	8070	■		<b>8629661613430</b>	
69	I	✓	-	80	4000	12000	8070	□		<b>8629661613410</b>	
54	I	✓	-	80	4000	8900	5970	■		<b>8629661453430</b>	
54	I	✓	-	80	4000	8900	5970	□		<b>8629661453410</b>	



# PLATO 600




Scan the QR-code for the latest information

- WH-87 / White / Textured

## PLATO 600 MP


IP40 - IK06 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	EMEC	EN EN 12464-1	CRI	KELVIN	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
32	II	-	✓	80	4000	5054	4080	□		<b>3116608</b>	
32	II	-	✓	80	3000	4718	3848	□		<b>3116607</b>	




## Optional accessories

DESCRIPTION	COLOR	PART NUMBER	PRONTO
<b>PLATO 600</b>			
Ceiling kit		<b>3116983</b>	
Suspension kit		<b>3116616</b>	




3116983



3116616

# PLATO 625




Scan the QR-code for the latest information

WH-RAL9016 / White RAL9016 / Textured

## PLATO 625 OP MULTIPOWER

IP20 - IK06 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	EN CH 12664-1	CRI	KELVIN	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
23/29/35/41	I	-	-	80	4000	6500	4880	<input type="checkbox"/>		<b>3114723</b>	
23/29/35/41	I	-	-	80	3000	6500	4890	<input type="checkbox"/>		<b>3114722</b>	




## Optional accessories

DESCRIPTION	COLOR	PART NUMBER	PRONTO
<b>PLATO 625</b>			
Ceiling rose	<input type="checkbox"/>	<b>890000410</b>	
Y-wire suspension (1,5 m)		<b>86252015</b>	




890000410



86252015

# PLATO 1200




Scan the QR-code for the latest information

WH-87 / White / Textured

## PLATO 1200 MP


IP40 - IK06 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	EN CH 12664-1	CRI	KELVIN	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
32	II	-	✓	80	4000	5240	4245	<input type="checkbox"/>	1195	<b>3116612</b>	
32	II	-	✓	80	3000	4660	3802	<input type="checkbox"/>	1195	<b>3116611</b>	




## Optional accessories

DESCRIPTION	COLOR	PART NUMBER	PRONTO
<b>PLATO 1200</b>			
Suspension kit		<b>3116616</b>	



3116616

# ELA 600




Scan the QR-code for the latest information

WH-87 / White / Textured

## ELA 600 PR

IP40 - IK06 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	EMEC	DM EN 12464-1	CRI	KELVIN	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
32	II	-	✓	80	4000	4600	3988	□	595	<b>3116604</b>	
32	II	-	✓	80	3000	4380	3590	□	595	<b>3116603</b>	



# ELA 625




Scan the QR-code for the latest information

WH-RAL9016 / White RAL9016 / Textured


## ELA 625 PR

IP20 - IK06 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	EMEC	DM EN 12464-1	CRI	KELVIN	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
33	I	-	✓	80	4000	-	4150	□	620	<b>3118517</b>	
33	I	-	✓	80	3000	-	3720	□	620	<b>3118516</b>	
<b>Power LED - dimmable DALI 220-240 V 50/60 Hz</b>											
33	I	-	✓	80	4000	-	4150	□	620	<b>3118519</b>	
33	I	-	✓	80	3000	-	3720	□	620	<b>3118518</b>	



# LAMA+



WH-87 / White / Textured




Scan the QR-code for the latest information

## LAMA+ S/W

IP66 - IK07 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CE	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PHOTO
<b>Power LED 220-240 V 50/60 Hz</b>											
206	I	✓	80	4000	S/W	-	34485	29954	<input type="checkbox"/>	<b>06272087</b>	
150	I	✓	80	4000	S/W	-	26766	23489	<input type="checkbox"/>	<b>06280287</b>	




## LAMA+ S/EW

IP66 - IK07 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CE	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PHOTO
<b>Power LED 220-240 V 50/60 Hz</b>											
206	I	✓	80	4000	S/EW	-	34485	32189	<input type="checkbox"/>	<b>06271887</b>	
150	I	✓	80	4000	S/EW	-	26766	25165	<input type="checkbox"/>	<b>06280087</b>	
99	I	✓	80	4000	S/EW	-	19229	17402	<input type="checkbox"/>	<b>06271987</b>	
64	I	✓	80	4000	S/EW	-	12815	11994	<input type="checkbox"/>	<b>06280187</b>	

Identifying and classifying our optics



# LAMA+ MINI




Scan the QR-code for the latest information

WH-87 / White / Textured


## LAMA+ MINI S/EW

IP66 - IK06

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR/ FINISH	PART NUMBER	PHOTO
<b>Power LED 220-240 V 50/60 Hz</b>											
101	I	-	80	4000	S/EW	-	16732	14765	<input type="checkbox"/>	<b>3101188</b>	
72	I	-	80	4000	S/EW	-	12479	11332	<input type="checkbox"/>	<b>3101189</b>	



Identifying and classifying our optics



# A+



■ BK-RAL9005 / Black RAL9005 / Textured

Scan the QR-code for the latest information


## A+ 60 C/EW

IP65 - IK08 - 960 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PROFITO
-----------------------	-------	------	-----	--------	-------	------------	-------------------------------	-----------------------------	----------------	-------------	---------

Power LED 220-240 V 50/60 Hz

60	I	-	80	4000	C/EW	-	9630	8456	■	<b>3111273</b>	
----	---	---	----	------	------	---	------	------	---	----------------	--




## A+ 100 C/EW

IP65 - IK08 - 960 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PROFITO
-----------------------	-------	------	-----	--------	-------	------------	-------------------------------	-----------------------------	----------------	-------------	---------

Power LED dimmable 1-10 V 220-240 V 50/60 Hz

100	I	-	80	4000	C/EW	-	16000	13903	■	<b>3111274</b>	
-----	---	---	----	------	------	---	-------	-------	---	----------------	--




## A+ 150 C/EW

IP65 - IK08 - 960 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PROFITO
-----------------------	-------	------	-----	--------	-------	------------	-------------------------------	-----------------------------	----------------	-------------	---------

Power LED dimmable 1-10 V 220-240 V 50/60 Hz

150	I	-	80	4000	C/EW	-	24000	20713	■	<b>3111275</b>	
-----	---	---	----	------	------	---	-------	-------	---	----------------	--




## A+ 200 C/EW

IP65 - IK08 - 960 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PROFITO
-----------------------	-------	------	-----	--------	-------	------------	-------------------------------	-----------------------------	----------------	-------------	---------

Power LED dimmable 1-10 V 220-240 V 50/60 Hz

200	I	-	80	4000	C/EW	-	32000	27222	■	<b>3111276</b>	
-----	---	---	----	------	------	---	-------	-------	---	----------------	--



## Optional accessories

DESCRIPTION	COLOR	PART NUMBER	PROFITO
-------------	-------	-------------	---------

A+ 100 / A+ 150 / A+ 200

Microwave motion sensor		<b>3111277</b>	
-------------------------	--	----------------	--

Remote control A+		<b>3111278</b>	
-------------------	--	----------------	--



3111277



3111278

# ACRO BASIC



Scan the QR-code for the latest information


■ GR-RAL7035 / Grey RAL7035 / Matt

## ACRO BASIC EQ136

IP66 - IK03 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CE	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	LENGTH (mm)	PART NUMBER	PRINTO
23	I	✓	80	4000	S/EW	-	-	3000	■	1185	<b>3103939</b>	

Power LED 220-240 V 50/60 Hz




## ACRO BASIC EQ236

IP66 - IK03 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CE	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	LENGTH (mm)	PART NUMBER	PRINTO
37	I	✓	80	4000	S/EW	-	-	4800	■	1185	<b>3103940</b>	

Power LED 220-240 V 50/60 Hz




## ACRO BASIC EQ158

IP66 - IK03 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CE	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	LENGTH (mm)	PART NUMBER	PRINTO
29	I	✓	80	4000	S/EW	-	-	4300	■	1477	<b>3103941</b>	

Power LED 220-240 V 50/60 Hz




## ACRO BASIC EQ258

IP66 - IK03 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CE	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	LENGTH (mm)	PART NUMBER	PRINTO
50	I	✓	80	4000	S/EW	-	-	6800	■	1477	<b>3103942</b>	

Power LED 220-240 V 50/60 Hz





# ACRO PRO



■ GR-RAL7035 / Grey RAL7035 / Matt

Scan the QR-code for the latest information


## ACRO PRO EQ218 MULTIPOWER

IP66 - IK08 - 850 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PROFITO
--------------------------	-------	------	-----	--------	-------	------------	----------------------------------	--------------------------------	-------------------	-------------	-------------	---------

Power LED 220-240 V 50/60 Hz

11.5/15/17/20 | - 80 4000 S/EW - 2800 2506 ■ 615 **3114690**




## ACRO PRO EQ236 MULTIPOWER

IP66 - IK08 - 850 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PROFITO
--------------------------	-------	------	-----	--------	-------	------------	----------------------------------	--------------------------------	-------------------	-------------	-------------	---------

Power LED 220-240 V 50/60 Hz

18/22.5/27.5/31 | - 80 4000 S/EW - 5350 4981 ■ 1174 **3114691**




## ACRO PRO EQ258 MULTIPOWER

IP66 - IK08 - 850 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PROFITO
--------------------------	-------	------	-----	--------	-------	------------	----------------------------------	--------------------------------	-------------------	-------------	-------------	---------

Power LED 220-240 V 50/60 Hz

24/29/36/42 | - 80 4000 S/EW - 7100 6588 ■ 1454 **3114696**



# NORMA+



Scan the QR-code for the latest information

■ GR-RAL7035 / Grey RAL7035 / Matt


## NORMA+ 60

IP65 - IK09 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE & LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PRINTO
-----------------------	-------	------	-----	--------	-------	------------	----------------------------------	-----------------------------	----------------	-------------	-------------	--------

### Power LED 220-240 V 50/60 Hz

27	I	-	80	4000	S/EW	-	4077	3258	■	630	<b>305949</b>	
18	I	-	80	4000	S/EW	-	2718	2246	■	630	<b>305948</b>	




## NORMA+ 60 CL

IP65 - IK09 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE & LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PRINTO
-----------------------	-------	------	-----	--------	-------	------------	----------------------------------	-----------------------------	----------------	-------------	-------------	--------

### Power LED 220-240 V 50/60 Hz

27	I	-	80	4000	S/EW	-	4077	3258	■	660	<b>305941</b>	
18	I	-	80	4000	S/EW	-	2718	2246	■	660	<b>305940</b>	




## NORMA+ 120

IP65 - IK09 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE & LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PRINTO
-----------------------	-------	------	-----	--------	-------	------------	----------------------------------	-----------------------------	----------------	-------------	-------------	--------

### Power LED 220-240 V 50/60 Hz

45	I	-	80	4000	S/EW	-	6795	5215	■	1230	<b>305952</b>	
34	I	-	80	4000	S/EW	-	5134	3932	■	1230	<b>305951</b>	
25	I	-	80	4000	S/EW	-	3775	3002	■	1230	<b>305950</b>	




## NORMA+ 120 CL

IP65 - IK09 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE & LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PRINTO
-----------------------	-------	------	-----	--------	-------	------------	----------------------------------	-----------------------------	----------------	-------------	-------------	--------

### Power LED 220-240 V 50/60 Hz

45	I	-	80	4000	S/EW	-	6795	5215	■	1260	<b>305944</b>	
34	I	-	80	4000	S/EW	-	5134	3932	■	1260	<b>305943</b>	
25	I	-	80	4000	S/EW	-	3775	3002	■	1260	<b>305942</b>	




## NORMA+ 150

IP65 - IK09 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE & LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PRINTO
-----------------------	-------	------	-----	--------	-------	------------	----------------------------------	-----------------------------	----------------	-------------	-------------	--------

### Power LED 220-240 V 50/60 Hz

60	I	-	80	4000	S/EW	-	9060	7556	■	1530	<b>305954</b>	
----	---	---	----	------	------	---	------	------	---	------	---------------	--




## NORMA+ 150 CL

IP65 - IK09 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE & LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PRINTO
-----------------------	-------	------	-----	--------	-------	------------	----------------------------------	-----------------------------	----------------	-------------	-------------	--------

### Power LED 220-240 V 50/60 Hz

68	I	-	80	4000	S/EW	-	10268	8395	■	1560	<b>305947</b>	
60	I	-	80	4000	S/EW	-	9060	7556	■	1560	<b>305946</b>	
35	I	-	80	4000	S/EW	-	5285	4355	■	1560	<b>305945</b>	



# BLIZ




Scan the QR-code for the latest information

- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured

## BLIZ RING

IP65 - IK07

LAMPHOLDER	LUMINAIRE WATTAGE [W]	CLASS	ENEC	CE	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
E27	1x60	I	✓	-	-	S/EW	-	-	-	■	<b>700192</b>	
E27	1x60	I	✓	-	-	S/EW	-	-	-	■	<b>700193</b>	



# EKO+26




Scan the QR-code for the latest information

- AN-96 / Anthracite gray / Textured


## EKO+26

IP66 - IK07

LAMPHOLDER	LUMINAIRE WATTAGE [W]	CLASS	ENEC	CE	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
E27	1x100	I	-	-	-	S/EW	-	-	-	■	<b>302063</b>	



# EKO 21/26




Scan the QR-code for the latest information

- BK-81 / Black / Textured
- WH-87 / White / Textured

## EKO 21

IP44 - IK06 - 750 °C


LAMPHOLDER	LUMINAIRE VOLTAGE [V]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
E27	1x15	II	-	-	-	S/EW	-	-	-	■	<b>300455</b>	
E27	1x15	II	-	-	-	S/EW	-	-	-	□	<b>300454</b>	



## EKO 21 GRILL

IP44 - IK06 - 750 °C


LAMPHOLDER	LUMINAIRE VOLTAGE [V]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
E27	1x15	II	-	-	-	A/EW	-	-	-	■	<b>300485</b>	
E27	1x15	II	-	-	-	A/EW	-	-	-	□	<b>300484</b>	




## EKO 26

IP44 - IK06 - 750 °C

LAMPHOLDER	LUMINAIRE VOLTAGE [V]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
E27	1x23	II	-	-	-	S/EW	-	-	-	□	<b>300334</b>	



# NIKKO+21




Scan the QR-code for the latest information

■ AN-96 / Anthracite gray / Textured

## NIKKO+21

IP65 - IK05

LAMPHOLDER	LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PHOTO
E27	1x60	I	-	-	-	S/EW	-	-	-	■	<b>002002</b>	



# DROP 28




Scan the QR-code for the latest information

□ WH-87 / White / Textured

## DROP 28 LED

IP55 - IK06 - 750 °C


LAMPHOLDER	LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PHOTO
Power LED 220-240 V 50/60 Hz												
LED	16	II	-	80	3000	S/EW	-	2226	1336	□	<b>303063</b>	




## DROP 28

IP55 - IK06 - 750 °C

LAMPHOLDER	LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PHOTO
E27	1x100	II	-	-	-	S/EW	-	-	-	□	<b>004951</b>	



# MULTI+ 30 PC



WH-87 / White / Textured



Scan the QR-code for the latest information


## MULTI+ 30 PC

IP65 - IK10 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRINTO
-----------------------	-------	------	----	--------	-------	------------	-------------------------------	-----------------------------	----------------	-------------	--------

### Power LED 220-240 V 50/60 Hz

16	II	-	80	4000	S/EW	-	2447	1292	<input type="checkbox"/>	<b>304161</b>	
16	II	-	80	3000	S/EW	-	2226	1270	<input type="checkbox"/>	<b>304160</b>	




## MULTI+ 30 PC HF

IP65 - IK10 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRINTO
-----------------------	-------	------	----	--------	-------	------------	-------------------------------	-----------------------------	----------------	-------------	--------

### Power LED 230 V 50 Hz

16	II	-	80	4000	S/EW	-	2447	1292	<input type="checkbox"/>	<b>304169</b>	
16	II	-	80	3000	S/EW	-	2226	1270	<input type="checkbox"/>	<b>304168</b>	

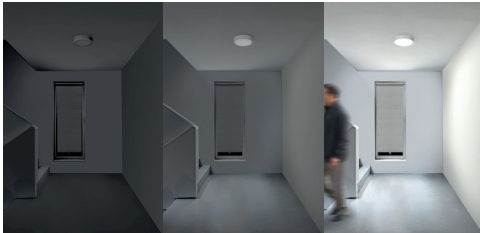

OFF  
0%

ON - SMART  
30%

ON - SMART  
100%

# MULTI+ 40 PC



WH-87 / White / Textured



Scan the QR-code for the latest information


## MULTI+ 40 PC

IP65 - IK10 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRINTO
-----------------------	-------	------	----	--------	-------	------------	-------------------------------	-----------------------------	----------------	-------------	--------

### Power LED 220-240 V 50/60 Hz

27	II	-	80	4000	S/EW	-	4284	2278	<input type="checkbox"/>	<b>304127</b>	
27	II	-	80	3000	S/EW	-	4141	2146	<input type="checkbox"/>	<b>304126</b>	




## MULTI+ 40 PC HF

IP65 - IK10 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRINTO
-----------------------	-------	------	----	--------	-------	------------	-------------------------------	-----------------------------	----------------	-------------	--------

### Power LED 230 V 50 Hz

27	II	-	80	4000	S/EW	-	4284	2278	<input type="checkbox"/>	<b>304135</b>	
27	II	-	80	3000	S/EW	-	4141	2146	<input type="checkbox"/>	<b>304134</b>	

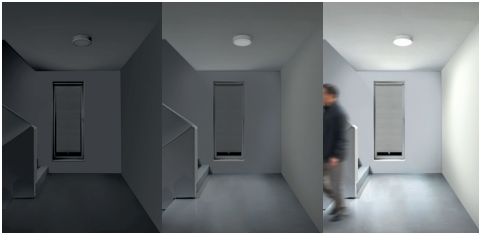

OFF  
0%

ON - SMART  
30%

ON - SMART  
100%

# CLY



Scan the QR-code for the latest information

## CLY


IP65 - IK10 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PHOTO
<b>Power LED 220-240 V 50/60 Hz</b>											
17	II	-	80	3000/4000	S/EW	-	2534	1695		<b>3116565</b>	

## CLY DLS+DETEK

IP65 - IK10 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PHOTO
<b>Power LED 220-240 V 50/60 Hz + HF Sensor</b>											
17	II	-	80	3000/4000	S/EW	-	2534	1695		<b>3116566</b>	



## CLY EM/3P


IP65 - IK10 - 850 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PHOTO
<b>Power LED - Emergency 3h - 220-240 V 50/60 Hz</b>											
17	II	-	80	3000/4000	S/EW	-	2534	1695		<b>3116567</b>	

## CLY EM/3P+DLS+DETEK

IP65 - IK10 - 850 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PHOTO
<b>Power LED - Emergency 3h - 220-240 V 50/60 Hz + HF Sensor</b>											
17	II	-	80	3000/4000	S/EW	-	2534	1695		<b>3116568</b>	

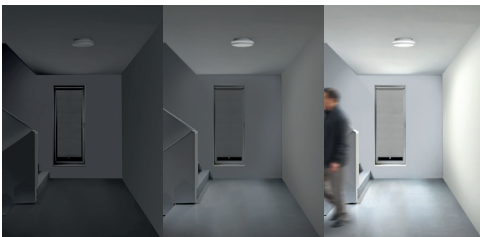


OFF  
0%

ON - DLS+DETEK  
30%

ON - DLS+DETEK  
100%



# STILO+




Scan the QR-code for the latest information

■ AN-96 / Anthracite gray / Textured

## STILO+MIDI H720

IP44 - IK04


LAMPHOLDER	LUMINAIRE WATTAGE [W]	CLASS	ENEC	CEI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
E27	1x60	I	-	-	-	S/EW	-	-	-	■	302275	





## STILO+MAXI H1290

IP44 - IK04

LAMPHOLDER	LUMINAIRE WATTAGE [W]	CLASS	ENEC	CEI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
E27	1x75	I	-	-	-	S/EW	-	-	-	■	302284	



# PADO




Scan the QR-code for the latest information

- AN-96 / Anthracite gray / Textured
- BK-81 / Black / Textured

## PADO 600

IP65 - IK05


LUMINAIRE WASTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PROFITO
Power LED 220-240 V 50/60 Hz											
20	I	-	80	3000	S/EW	-	1974	1080	■	<b>304085</b>	



## PADO 900

IP65 - IK05


LUMINAIRE WASTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PROFITO
Power LED 220-240 V 50/60 Hz											
20	I	-	80	3000	S/EW	-	1974	1080	■	<b>304089</b>	



## PADO

IP65 - IK05



LUMINAIRE WASTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PROFITO
Power LED 220-240 V 50/60 Hz											
20	I	-	80	3000	S/EW	-	1974	1080	■	<b>304093</b>	



## PADO BASIC

IP65 - IK05

LUMINAIRE WASTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PROFITO
Power LED 220-240 V 50/60 Hz											
9.5	I	-	80	3000	S/EW	-	1491	830	■	<b>306289</b>	

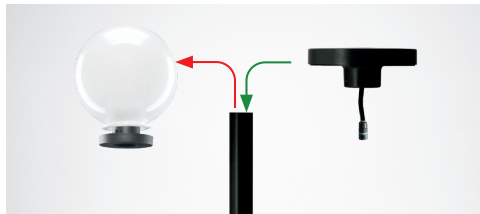

# QUASAR 10 CEILING




Scan the QR-code for the latest information

- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

## QUASAR 10 CEILING

IP40 - IK06

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRINTO
<b>Power LED 230 V 50 Hz</b>											
6	I	-	80	3000	S/EW	-	500	221	■	<b>304489</b>	
6	I	-	80	3000	S/EW	-	500	221	□	<b>304491</b>	



# QUASAR 30 CEILING




Scan the QR-code for the latest information

- AN-96 / Anthracite gray / Textured


## QUASAR 30 CEILING TECH

IP65 - IK07

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRINTO
<b>Power LED 220-240 V 50/60 Hz</b>											
20	I	✓	80	4000	S/I	-	2384	1652	■	<b>306175</b>	
20	I	✓	80	3000	S/I	-	2276	1482	■	<b>306176</b>	



# QUASAR 10



Scan the QR-code for the latest information

- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- BK-81 / Black / Textured
- WH-87 / White / Textured


## QUASAR 10 1WB

IP44 - IK02

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CE	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
-----------------------	-------	------	----	--------	-------	------------	--------------------------------	-----------------------------	----------------	-------------	--------

### Power LED 220-240 V 50/60 Hz

3.5	I	✓	80	3000	R	-	150	100	■	<b>303354</b>	
3.5	I	✓	80	4000	R	-	230	122	■	<b>303357</b>	
3.5	I	✓	80	3000	R	-	150	100	■	<b>303356</b>	
3.5	I	✓	80	3000	R	-	150	100	■	<b>30335690104</b>	
3.5	I	✓	80	3000	R	-	150	100	□	<b>303450</b>	



## QUASAR 10 2WB

IP44 - IK02

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CE	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
-----------------------	-------	------	----	--------	-------	------------	--------------------------------	-----------------------------	----------------	-------------	--------

### Power LED 220-240 V 50/60 Hz

6	I	✓	80	3000	R	-	300	192	■	<b>303360</b>	
6	I	✓	80	4000	R	-	460	235	■	<b>303363</b>	
6	I	✓	80	3000	R	-	300	192	■	<b>303362</b>	
6	I	✓	80	3000	R	-	300	192	■	<b>30336290102</b>	
6	I	✓	80	3000	R	-	300	192	□	<b>303452</b>	



## QUASAR 10 1NB+1WB

IP44 - IK02

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CE	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
-----------------------	-------	------	----	--------	-------	------------	--------------------------------	-----------------------------	----------------	-------------	--------

### Power LED 220-240 V 50/60 Hz

6	I	✓	80	4000	R	-	460	141	■	<b>303369</b>	
6	I	✓	80	3000	R	-	300	113	■	<b>303368</b>	



# QUASAR 20




Scan the QR-code for the latest information

- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- BK-81 / Black / Textured
- WH-87 / White / Textured

## QUASAR 20 M

IP65 - IK06

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PHOTO
<b>Power LED 220-240 V 50/60 Hz</b>											
11	I	✓	80	3000	S/EW	-	1292	492	■	<b>303542</b>	
11	I	✓	80	4000	S/EW	-	1356	519	■	<b>303539</b>	
11	I	✓	80	3000	S/EW	-	1292	492	■	<b>303540</b>	
11	I	✓	80	4000	S/EW	-	1356	519	■	<b>303537</b>	
11	I	✓	80	3000	S/EW	-	1292	492	■	<b>303538</b>	



## QUASAR 20 TECH

IP65 - IK07

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PHOTO
<b>Power LED 220-240 V 50/60 Hz</b>											
11	I	✓	80	4000	A30/M	30°	1356	797	■	<b>303535</b>	
11	I	✓	80	3000	A30/M	30°	1292	758	■	<b>303536</b>	
11	I	✓	80	4000	A30/M	30°	1356	797	■	<b>303533</b>	
11	I	✓	80	3000	A30/M	30°	1292	758	■	<b>303534</b>	
11	I	✓	80	4000	A30/M	30°	1356	797	■	<b>303531</b>	
11	I	✓	80	3000	A30/M	30°	1292	758	■	<b>303532</b>	

## QUASAR 20 B

IP65 - IK06

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PHOTO
<b>Power LED 220-240 V 50/60 Hz</b>											
20	I	✓	80	4000	S/EW	-	2712	985	■	<b>303547</b>	
20	I	✓	80	3000	S/EW	-	2584	930	■	<b>303548</b>	
20	I	✓	80	4000	S/EW	-	2712	985	■	<b>303545</b>	
20	I	✓	80	3000	S/EW	-	2584	930	■	<b>303546</b>	
20	I	✓	80	4000	S/EW	-	2712	985	■	<b>303543</b>	
20	I	✓	80	3000	S/EW	-	2584	930	■	<b>303544</b>	

## QUASAR 20 DOUBLE TECH

IP65 - IK07

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PHOTO
<b>Power LED 220-240 V 50/60 Hz</b>											
20	I	✓	80	4000	A30/M	-	2712	1475	■	<b>304100</b>	
20	I	✓	80	3000	A30/M	-	2584	1417	■	<b>304097</b>	
20	I	✓	80	4000	A30/M	-	2712	1475	■	<b>304101</b>	
20	I	✓	80	3000	A30/M	-	2584	1417	■	<b>304098</b>	
20	I	✓	80	3000	A30/M	-	2584	1417	■	<b>30409890104</b>	
20	I	✓	80	4000	A30/M	-	2712	1475	■	<b>304099</b>	
20	I	✓	80	3000	A30/M	-	2584	1417	■	<b>304096</b>	

# QUASAR 30




Scan the QR-code for the latest information

- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- BK-81 / Black / Textured
- WH-87 / White / Textured

## QUASAR 30 M

IP65 - IK06

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
20	I	✓	80	3000	S/EW	-	2584	936	■	<b>303558</b>	
20	I	✓	80	3000	S/EW	-	2584	936	□	<b>303556</b>	



## QUASAR 30 TECH

IP65 - IK07

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
20	I	✓	80	4000	A30/M	30°	2712	1606	■	<b>303553</b>	
20	I	✓	80	3000	A30/M	30°	2584	1557	■	<b>303554</b>	
20	I	✓	80	4000	A30/M	30°	2712	1606	■	<b>303551</b>	
20	I	✓	80	3000	A30/M	30°	2584	1557	■	<b>303552</b>	
20	I	✓	80	3000	A30/M	30°	2584	1557	■	<b>30355290105</b>	
20	I	✓	80	4000	A30/M	30°	2712	1606	□	<b>303549</b>	
20	I	✓	80	3000	A30/M	30°	2584	1557	□	<b>303550</b>	



## QUASAR 30 B

IP65 - IK06

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
32	I	✓	80	3000	S/EW	-	4572	1532	■	<b>303564</b>	
32	I	✓	80	3000	S/EW	-	4572	1532	□	<b>303562</b>	



## QUASAR 30 DOUBLE TECH

IP65 - IK07

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
32	I	✓	80	3000	A30/M	-	4572	2427	■	<b>304103</b>	
32	I	✓	80	4000	A30/M	-	4800	2489	■	<b>304107</b>	
32	I	✓	80	3000	A30/M	-	4572	2427	■	<b>304104</b>	
32	I	✓	80	4000	A30/M	-	4800	2489	□	<b>304105</b>	
32	I	✓	80	3000	A30/M	-	4572	2427	□	<b>304102</b>	



# ORION H




Scan the QR-code for the latest information

- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

## ORION H M

IP65 - IK06

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR/FINISH	PART NUMBER	FRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
5	I	-	80	4000	A/EW	-	742	363	■	<b>3105448</b>	
5	I	-	80	3000	A/EW	-	675	352	■	<b>3105446</b>	
5	I	-	80	4000	A/EW	-	742	363	□	<b>3105449</b>	
5	I	-	80	3000	A/EW	-	675	352	□	<b>3105447</b>	



## ORION H B

IP65 - IK06

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR/FINISH	PART NUMBER	FRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
10	I	-	80	4000	A/EW	-	1485	845	■	<b>3105452</b>	
10	I	-	80	3000	A/EW	-	1350	792	■	<b>3105450</b>	
10	I	-	80	3000	A/EW	-	1350	792	□	<b>3105451</b>	



# ORION V




Scan the QR-code for the latest information

- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

## ORION V M

IP65 - IK06

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR/FINISH	PART NUMBER	FRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
5	I	-	80	4000	S/EW	-	742	578	■	<b>3105440</b>	
5	I	-	80	3000	S/EW	-	675	539	■	<b>3105438</b>	
5	I	-	80	3000	S/EW	-	675	539	□	<b>3105439</b>	




## ORION V B

IP65 - IK06

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR/FINISH	PART NUMBER	FRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
10	I	-	80	4000	S/EW	-	1484	1125	■	<b>3105444</b>	
10	I	-	80	3000	S/EW	-	1350	1065	■	<b>3105442</b>	
10	I	-	80	3000	S/EW	-	1350	1065	□	<b>3105443</b>	



# SHIELD+ 1




Scan the QR-code for the latest information

■ AN-96 / Anthracite gray / Textured


## SHIELD+ 1 MULTIPOWER

IP66 - IK07

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRINTO
<b>Power LED 220-240 V 50/60 Hz</b>											
13/19/27	I	-	80	4000	A/EW	-	3605	3072	■	<b>3106354</b>	
13/19/27	I	-	80	3000	A/EW	-	3515	2808	■	<b>3106352</b>	



# SHIELD+ 2




Scan the QR-code for the latest information

■ AN-96 / Anthracite gray / Textured

## SHIELD+ 2

IP66 - IK09

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRINTO
<b>Power LED 220-240 V 50/60 Hz</b>											
79	I	-	80	4000	A/EW	-	10552	7985	■	<b>3106328</b>	
79	I	-	80	3000	A/EW	-	10284	7261	■	<b>3106326</b>	





# INSERT+ ZERO




Scan the QR-code for the latest information

- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured


## INSERT+ ZERO

IP65 - IK08

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PROFITO
<b>Power LED 220-240 V 50/60 Hz</b>											
4.5	I	-	80	3000	A29/M	-	511	125	<input checked="" type="checkbox"/>	<b>304112</b>	
4.5	I	-	80	3000	A29/M	-	511	125	<input type="checkbox"/>	<b>304108</b>	



# INSERT+ ZERO CLIP




Scan the QR-code for the latest information

- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured


## INSERT+ ZERO CLIP

IP65 - IK08

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PROFITO
<b>Power LED 220-240 V 50/60 Hz</b>											
4.5	I	-	80	3000	A/M	-	511	142	<input checked="" type="checkbox"/>	<b>3100066</b>	
4.5	I	-	80	3000	A/M	-	511	142	<input type="checkbox"/>	<b>3100062</b>	



# INSERT+ ZERO GLASS




Scan the QR-code for the latest information

- WH-87 / White / Textured

## INSERT+ ZERO GLASS

IP65 - IK05

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PROFITO
<b>Power LED 220-240 V 50/60 Hz</b>											
4.5	I	-	80	3000	S/EW	-	511	78	<input type="checkbox"/>	<b>3114950</b>	



# INSERT+ 1/2




Scan the QR-code for the latest information

- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

## INSERT+ 1

IP65 - IK07


LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PROFITO
<b>Power LED 220-240 V 50/60 Hz</b>											
6	I	-	80	3000	A37/M	-	825	250	<input type="checkbox"/>	<b>304116</b>	
6	I	-	80	3000	A37/M	-	825	250	<input checked="" type="checkbox"/>	<b>304118</b>	
6	I	-	80	3000	A37/M	-	825	250	<input type="checkbox"/>	<b>304114</b>	



## INSERT+ 2


IP65 - IK07 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PROFITO
<b>Power LED 220-240 V 50/60 Hz</b>											
10	I	-	80	3000	A25/W	-	1350	503	<input type="checkbox"/>	<b>304122</b>	
10	I	-	80	3000	A25/W	-	1350	503	<input checked="" type="checkbox"/>	<b>304124</b>	
10	I	-	80	3000	A25/W	-	1350	503	<input type="checkbox"/>	<b>304120</b>	




## Mandatory accessories

DESCRIPTION	COLOR	PART NUMBER	PRONTO
<b>INSERT+ 1</b>			
Recessed box INSERT+ 1		<b>310475</b>	
<b>INSERT+ 2</b>			
Recessed box Insert + 2		<b>310490</b>	



310475

310490




### Complete unit


1A+1B = please order 2 codes

#### COMPONENTS

<b>A</b>	luminaire
<b>B</b>	recessed fixing kit








310475



310490

## Optional accessories

DESCRIPTION	COLOR	PART NUMBER	PRONTO
<b>INSERT+ 1</b>			
Adaptor INSERT+ 1 (retrofit kit Insert 1)		<b>310478</b>	
<b>INSERT+ 2</b>			
Adaptor NSERT+ 2 (retrofit kit Insert 2)		<b>310489</b>	




### Complete unit


1A+1C = please order 2 codes

#### COMPONENTS

<b>A</b>	luminaire
<b>C</b>	adaptor




INSERT 1



INSERT 2




INSERT+ 1



310478



INSERT+ 2



310489

# MIMIK 10 POST




Scan the QR-code for the latest information

- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite grey / Textured

## MIMIK 10 POST 300

IP65 - IK08


LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRINTO
<b>Power LED 220-240 V 50/60 Hz</b>											
10	I	✓	80	3000	A/I	-	1006	745	■	<b>304618</b>	



## MIMIK 10 POST 600

IP65 - IK08


LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRINTO
<b>Power LED 220-240 V 50/60 Hz</b>											
10	I	✓	80	4000	A/I	-	1075	915	■	<b>304616</b>	
10	I	✓	80	3000	A/I	-	1006	745	■	<b>304614</b>	



## MIMIK 10 POST 1000

IP65 - IK08

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRINTO
<b>Power LED 220-240 V 50/60 Hz</b>											
10	I	✓	70	4000	CP/T3	-	1076	762	■	<b>306553</b>	
10	I	✓	70	3000	CP/T3	-	1000	719	■	<b>306552</b>	



## MIMIK 10 POST 1000 HU


IP65 - IK08

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRINTO
<b>Power LED 220-240 V 50/60 Hz</b>											
10	I	✓	70	4000	CP/T3	-	1076	762	■	<b>3112998</b>	
10	I	✓	70	3000	CP/T3	-	1000	719	■	<b>3112997</b>	


## Mandatory accessories

DESCRIPTION	COLOR	PART NUMBER	PRINTO
<b>MIMIK 10 POST 1000</b>			
Plate HU MIMIK10 POST	■	<b>3112992</b>	
Plate FR MIMIK10 POST	■	<b>3112994</b>	

Identifying and classifying our optics



# TYK+ 10



■ AN-96 / Anthracite gray / Textured




Scan the QR-code for the latest information

## TYK+ 10 C/I

IP66 - IK06

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	FRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
7	I	-	80	4000	C/I	10°	700	560	■	<b>3107283</b>	
7	I	-	80	3000	C/I	10°	650	519	■	<b>3107284</b>	



## TYK+ 10 C/M

IP66 - IK06

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	FRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
7	I	-	80	4000	C/M	34°	700	598	■	<b>3107286</b>	
7	I	-	80	3000	C/M	34°	650	554	■	<b>3107287</b>	



## Optional accessories

DESCRIPTION	COLOR	PART NUMBER	FRONTO
TYK+ 10 Ground spike	■	<b>700191</b>	




700191

Identifying and classifying our optics



# FOCUS+ ZERO




Scan the QR-code for the latest information

■ AN-96 / Anthracite gray / Textured

## FOCUS+ ZERO S/EW

IP65 - IK06


LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOUR / FINISH	PART NUMBER	PRINTO
Power LED 220-240 V 50/60 Hz											
9.5	I	-	80	3000	S/EW	-	1350	1107	■	<b>304610</b>	



## FOCUS+ ZERO KIT S/EW

IP65 - IK06

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOUR / FINISH	PART NUMBER	PRINTO
Power LED 220-240 V 50/60 Hz											
9.5	I	-	80	3000	S/EW	-	1350	1009	■	<b>305508</b>	



# CRICKET+ 10



■ AN-96 / Anthracite gray / Textured




Scan the QR-code for the latest information

## CRICKET+ 10 C/I

IP67 - IK08 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	FRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
5	I	-	80	4000	C/I	-	475	446	■	<b>3109824</b>	
5	I	-	80	3000	C/I	-	440	415	■	<b>3109825</b>	



## CRICKET+ 10 C/M


IP67 - IK08 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	FRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
5	I	-	80	4000	C/M	-	475	436	■	<b>3109822</b>	
5	I	-	80	3000	C/M	-	440	406	■	<b>3109823</b>	

## Mandatory accessories

DESCRIPTION	COLOR	PART NUMBER	FRONTO
<b>CRICKET+ 10</b>			
Recessed box CRICKET+ 10 MARINE		<b>3109879</b>	

## Identifying and classifying our optics









# GUELL ZERO




- GR-94 / Metallic grey / Textured
- BK-RAL9005 / Black RAL9005 / Glossy

Scan the QR-code for the latest information

## GUELL ZERO S/M

IP66 - IK06 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	FRONT
<b>Power LED 220-240 V 50/60 Hz</b>											
28	I	-	80	4000	S/M	-	3461	3162	■	<b>306514</b>	
15	I	-	80	4000	S/M	-	1888	1603	■	<b>06115394</b>	



## GUELL ZERO A/W


IP66 - IK06 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	FRONT
<b>Power LED 220-240 V 50/60 Hz</b>											
28	I	-	80	4000	A30/W	-	3461	3167	■	<b>306523</b>	
15	I	-	80	4000	A30/W	-	1888	1589	■	<b>06115794</b>	


## GUELL ZERO KIT S/M

IP66 - IK06 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	FRONT
<b>Power LED 220-240 V 50/60 Hz</b>											
28	I	-	80	4000	S/M	-	3461	3162	■	<b>306541</b>	
28	I	-	80	3000	S/M	-	3296	3014	■	<b>306539</b>	
15	I	-	80	4000	S/M	-	1888	1603	■	<b>06124980</b>	



Identifying and classifying our optics



# GUELL 1




Scan the QR-code for the latest information

■ GR-94 / Metallic grey / Textured

## GUELL 1 S/W

IP66 - IK07 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CEI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	FRONT
<b>Power LED 220-240 V 50/60 Hz</b>											
51	I	-	80	4000	S/W	-	8099	6860	■	<b>3115049</b>	
36	I	-	80	4000	S/W	-	6074	5391	■	<b>3115054</b>	




## GUELL 1 A/W

IP66 - IK07 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CEI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	FRONT
<b>Power LED 220-240 V 50/60 Hz</b>											
51	I	-	80	4000	A40/W	-	8099	6505	■	<b>3115059</b>	
51	I	-	80	3000	A40/W	-	7660	6249	■	<b>3115060</b>	
36	I	-	80	4000	A40/W	-	6074	5112	■	<b>3115064</b>	
36	I	-	80	3000	A40/W	-	5748	5028	■	<b>3115065</b>	


Identifying and classifying our optics







# SPIDER+ 10




■ BK-81 / Black / Textured

Scan the QR-code for the latest information

## SPIDER+ 10 S/EW

IP66 - IK06


LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT/SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRINTO
Power LED 220-240 V 50/60 Hz											
9.5	I	-	80	3000	S/EW	-	1350	977	■	<b>3108608</b>	




## SPIDER+ 10 KIT S/EW

IP66 - IK06

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT/SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRINTO
Power LED 220-240 V 50/60 Hz											
9.5	I	-	80	3000	S/EW	-	1350	977	■	<b>3108612</b>	



# SPIDER+ 20




Scan the QR-code for the latest information

■ BK-81 / Black / Textured

## SPIDER+ 20 S/W MULTIPOWER

IP67 - IK05 - 960 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PROFITO
<b>Power LED 220-240 V 50/60 Hz</b>											
37/51	I	-	80	4000	S/W	-	6965	6179	■	<b>3106050</b>	
37/51	I	-	80	3000	S/W	-	6675	5921	■	<b>3106051</b>	




## SPIDER+ 20 A/EW MULTIPOWER

IP67 - IK05 - 960 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PROFITO
<b>Power LED 220-240 V 50/60 Hz</b>											
37/51	I	-	80	4000	A35/EW	-	6965	6005	■	<b>3106052</b>	
37/51	I	-	80	3000	A35/EW	-	6675	5754	■	<b>3106053</b>	

## Optional accessories

DESCRIPTION	COLOR	PART NUMBER	PROFITO
<b>SPIDER+ 20</b>			
500 mm wall mounting extension arm in sheet steel painted	■	<b>3107120</b>	
1000 mm wall mounting extension arm in sheet steel painted	■	<b>3107121</b>	




3107120




3107121

## Identifying and classifying our optics



# SPIDER+ 30




Scan the QR-code for the latest information

■ BK-81 / Black / Textured

## SPIDER+ 30 S/W MULTIPOWER

IP67 - IK06 - 960 °C

LUMINAIRE VOLTAGE [V]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRODUCT
<b>Power LED 220-240 V 50/60 Hz</b>											
74/101	I	-	80	4000	S/W	-	13930	11987	■	<b>3106054</b>	
74/101	I	-	80	3000	S/W	-	13350	11486	■	<b>3106055</b>	




## SPIDER+ 30 A/EW MULTIPOWER

IP67 - IK06 - 960 °C


LUMINAIRE VOLTAGE [V]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRODUCT
<b>Power LED 220-240 V 50/60 Hz</b>											
74/101	I	-	80	4000	A35/EW	-	13930	11649	■	<b>3106056</b>	
74/101	I	-	80	3000	A35/EW	-	13350	11162	■	<b>3106057</b>	

## Optional accessories

DESCRIPTION	COLOR	PART NUMBER	PRODUCT
<b>SPIDER+ 30</b>			
500 mm wall mounting extension arm in sheet steel painted	■	<b>3107120</b>	
1000 mm wall mounting extension arm in sheet steel painted	■	<b>3107121</b>	




3107120



3107121

## Identifying and classifying our optics





# HEDO+



Scan the QR-code for the latest information

■ AN-96 / Anthracite gray / Textured


## HEDO+ C/EW

IP65 - IK09


LUMINAIRE WATTAGE [W]	CLASS	EMEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRINTO
-----------------------	-------	------	-----	--------	-------	------------	--------------------------------	-----------------------------	----------------	-------------	--------

### Power LED 220-240 V 50/60 Hz


42	I	-	80	3000	C/EW	-	5894	3710	■	<b>3104689</b>	
23	I	-	80	3000	C/EW	-	3150	2080	■	<b>3104683</b>	



Identifying and classifying our optics



# LYRA+



Scan the QR-code for the latest information

■ AN-96 / Anthracite gray / Textured


## LYRA+ SR/100

IP66 - IK06

LUMINAIRE WATTAGE [W]	CLASS	EMEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRINTO
-----------------------	-------	------	-----	--------	-------	------------	--------------------------------	-----------------------------	----------------	-------------	--------


### Power LED - with automatic power reduction 220-240 V 50/60 Hz

54	II	-	70	4000	SR/100	100°	8680	7669	■	<b>3115299*</b>	
54	II	-	70	3000	SR/100	100°	7200	6970	■	<b>3115298*</b>	
30	II	-	70	4000	SR/100	100°	4480	3939	■	<b>3115297*</b>	
30	II	-	70	3000	SR/100	100°	3560	3580	■	<b>3115296*</b>	




\* The products will be available from September 2023.

Identifying and classifying our optics



# SPIDER+ POST





Scan the QR-code for the latest information

■ BK-81 / Black / Textured

## SPIDER+ POST A/EW MULTIPOWER

IP66 - IK06



LUMINAIRE WATTAGE [W]	CLASS	ENEC	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PROFITO
Power LED 220-240 V 50/60 Hz											
37/51	II	-	80	4000	A35/EW	-	6967	6005	■	<b>3109057</b>	
37/51	II	-	80	3000	A35/EW	-	6677	5754	■	<b>3109056</b>	



## SPIDER+ POST A/EW DLS+DETEK

IP65 - IK06

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PROFITO
Power LED 220-240 V 50/60 Hz											
40	II	-	80	4000	A35/EW	-	5525	4763	■	<b>3115352</b>	
40	II	-	80	3000	A35/EW	-	5291	4560	■	<b>3115351</b>	



## Optional accessories

DESCRIPTION	COLOR	PART NUMBER	PROFITO
<b>SPIDER+ POST</b> Wall angled bracket in hot dipped galvanized steel, cataphoresis and finished polyester - Ø 60 mm	■	<b>140779690100</b>	



140779690100



PERFORMANCE  
**IN** LIGHTING

powered by

**GEWISS**

**PERFORMANCE iN LIGHTING S.p.A.**

Viale del Lavoro 9/11  
37030 Colognola ai Colli (VR) - Italy  
T +39 045 61 59 211  
info.it@pil.lighting

[www.performanceinlighting.com](http://www.performanceinlighting.com)

**GEWISS IBÉRICA, S.A.**

Parque Empresarial Las Rozas (Edificio XiMad)  
C/ Gabriel García Marquez, 4  
28232 Las Rozas (Madrid)  
T: +34 916 707 100  
gewiss-es@gewiss.com

**GEWISS CHILE SPA**

Av. Ossa 235, Edificio Egaña piso 10  
Office 1035 y 1040, La Reina. Santiago  
T. +56 (2) 33403969  
gewiss-cl@gewiss.com

Visit [www.performanceinlighting.com](http://www.performanceinlighting.com) and follow us on:

